


NOTICE OF ASSEMBLE

Making tips


1. LED wiring indication:

White=Positive:Grev=Negative. 2.Use a craft blade to carefully skim over the plastic to bare the



3. For LED wiring extension, please refer to the below steps:





Twist the copper of both LED wire and extension wire together.



wire

Do the same on the white wire. Remarks: Tie a knot at the end of the grey wire to differentiate the polarity.



Place the duly twist wire on the tapes provided.



Roll and wrap the wire.



Place another wire next to it. Remarks: DO NOT contact both copper wire to avoid short circuit.



Roll and wrap it together.

Warnings

- The product is not suitable for children under 14 years old. The should be under custody of adults when playing with the product.
- There are small parts, please do not swallow them for avoiding dangerous accidents.

Tips for assembling

- 1. Picures shown on the package may be slightly different from the actual product.
- 2. Please use the provided tracing paper for cutting purpose to achieve the best
- outcome.
- 3. Product designs and specification may be subject to change without advance notice for purpose of making improvement.
- 4. Testing on LED function:



DO NOT contact the LED wire end direct to the battery cell.



Use the provide battery holder. Make sue the correct polarity.

How to assemble the battery holder



1.Material and tools needed: Battery holder, LED bulb.



2.Twist the following wire together:
(I) WHITE wire from the battery box with the GREY wire from LED bulb.
(II) GREY wire from the battery box with the WHITE wire from LED bulb.



3. Wrap the exposed wire with the tapes.



4. Tear off the rubber paper



5. Set the black key on the battery box to one side of "ON" as shown.




6. Ture on the power and complete the installation.


Product information




Cake cabinet

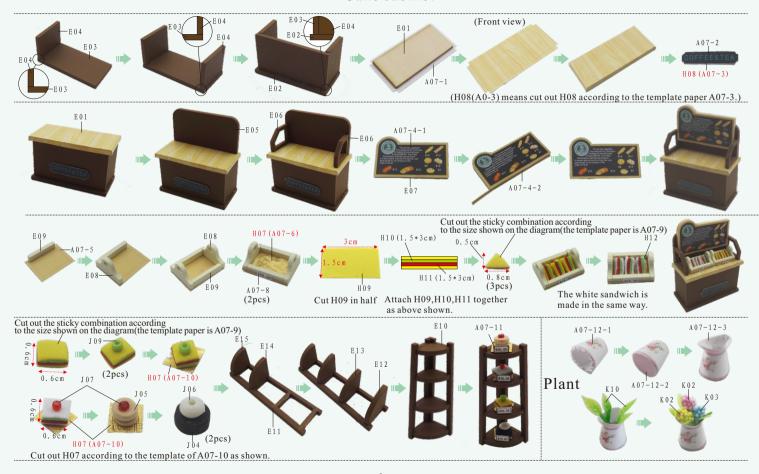


Bar counter

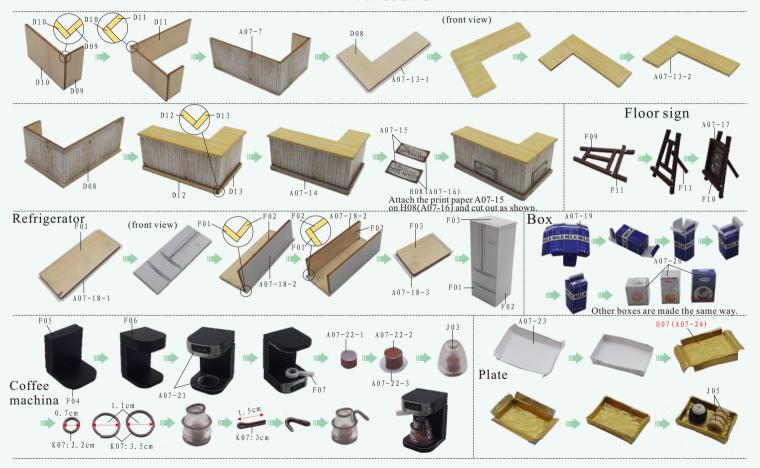

Wall cabinet

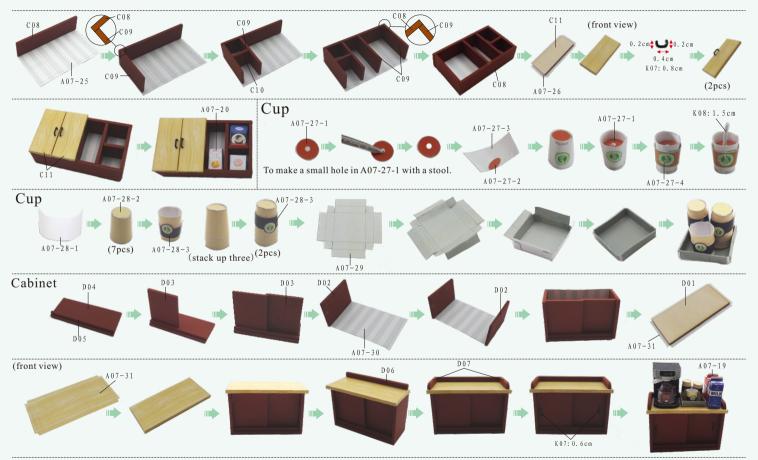


Bar stool

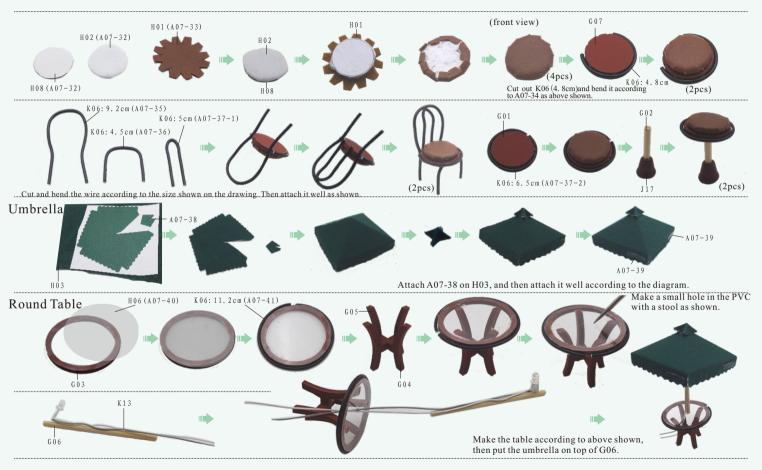


Service plate



Outer frame

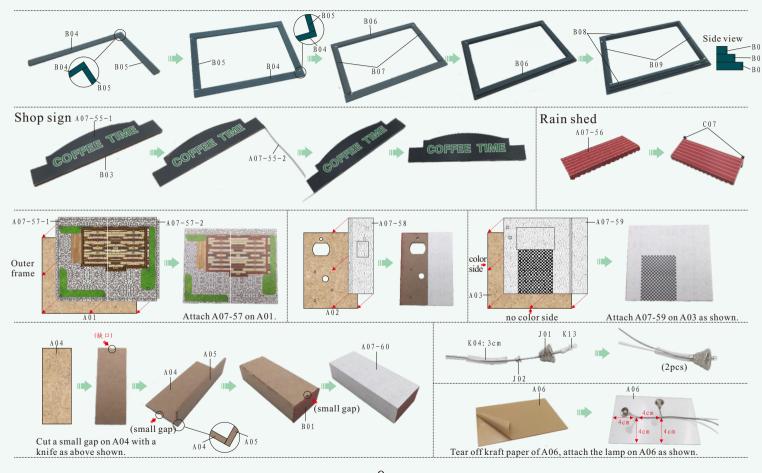

Outer frame

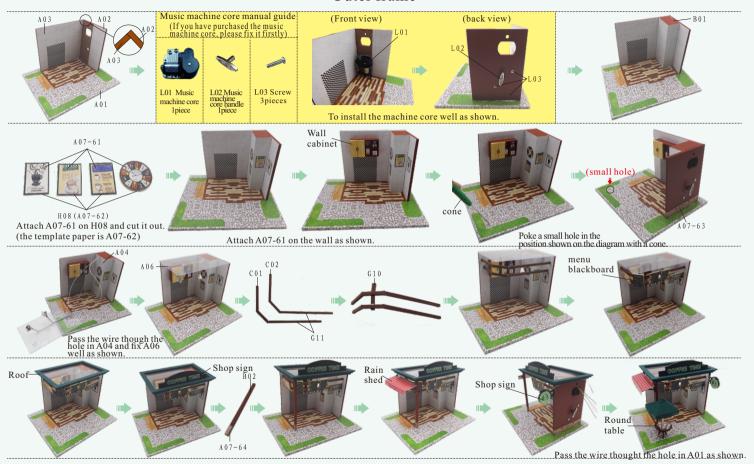

How to assemble the battery holder



Installation of dust proof cover (For updated version, the parts need to be purchased separately)



L04 Transparent cover 0.15*16*20 (3pieces)



L05 Transparent cover 0.15*15.7*16 (2pieces)



1. Tear off kraft paper of each piece of transparent cover.

complete the dust proof cover as shown.




Photo of Dust proof cover

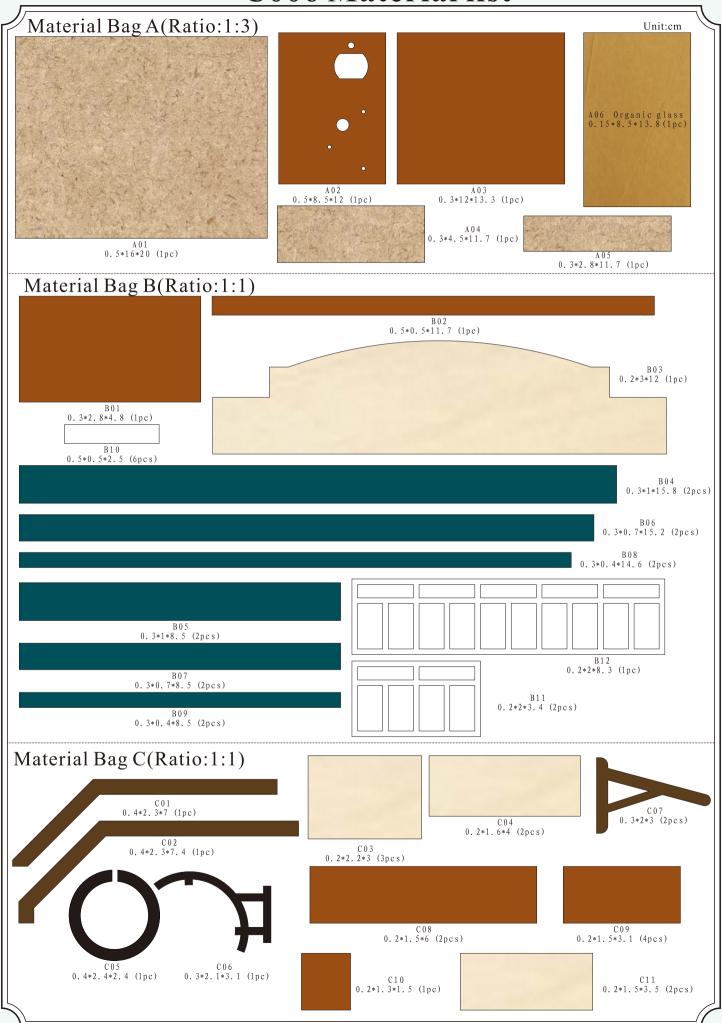



Photo Gallery





Attention: Please keep the instruction manual for future references.



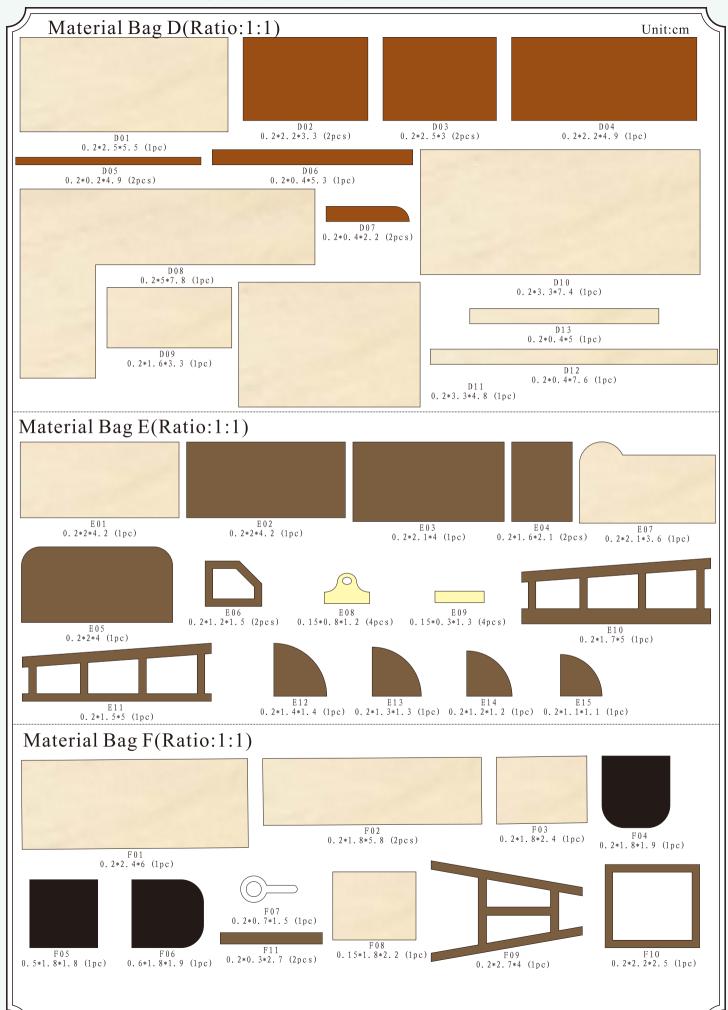



(1pc)

(1pc)

(4pcs)

C006 Shape chart of wire bending

